


1 Hot, 2 Cold

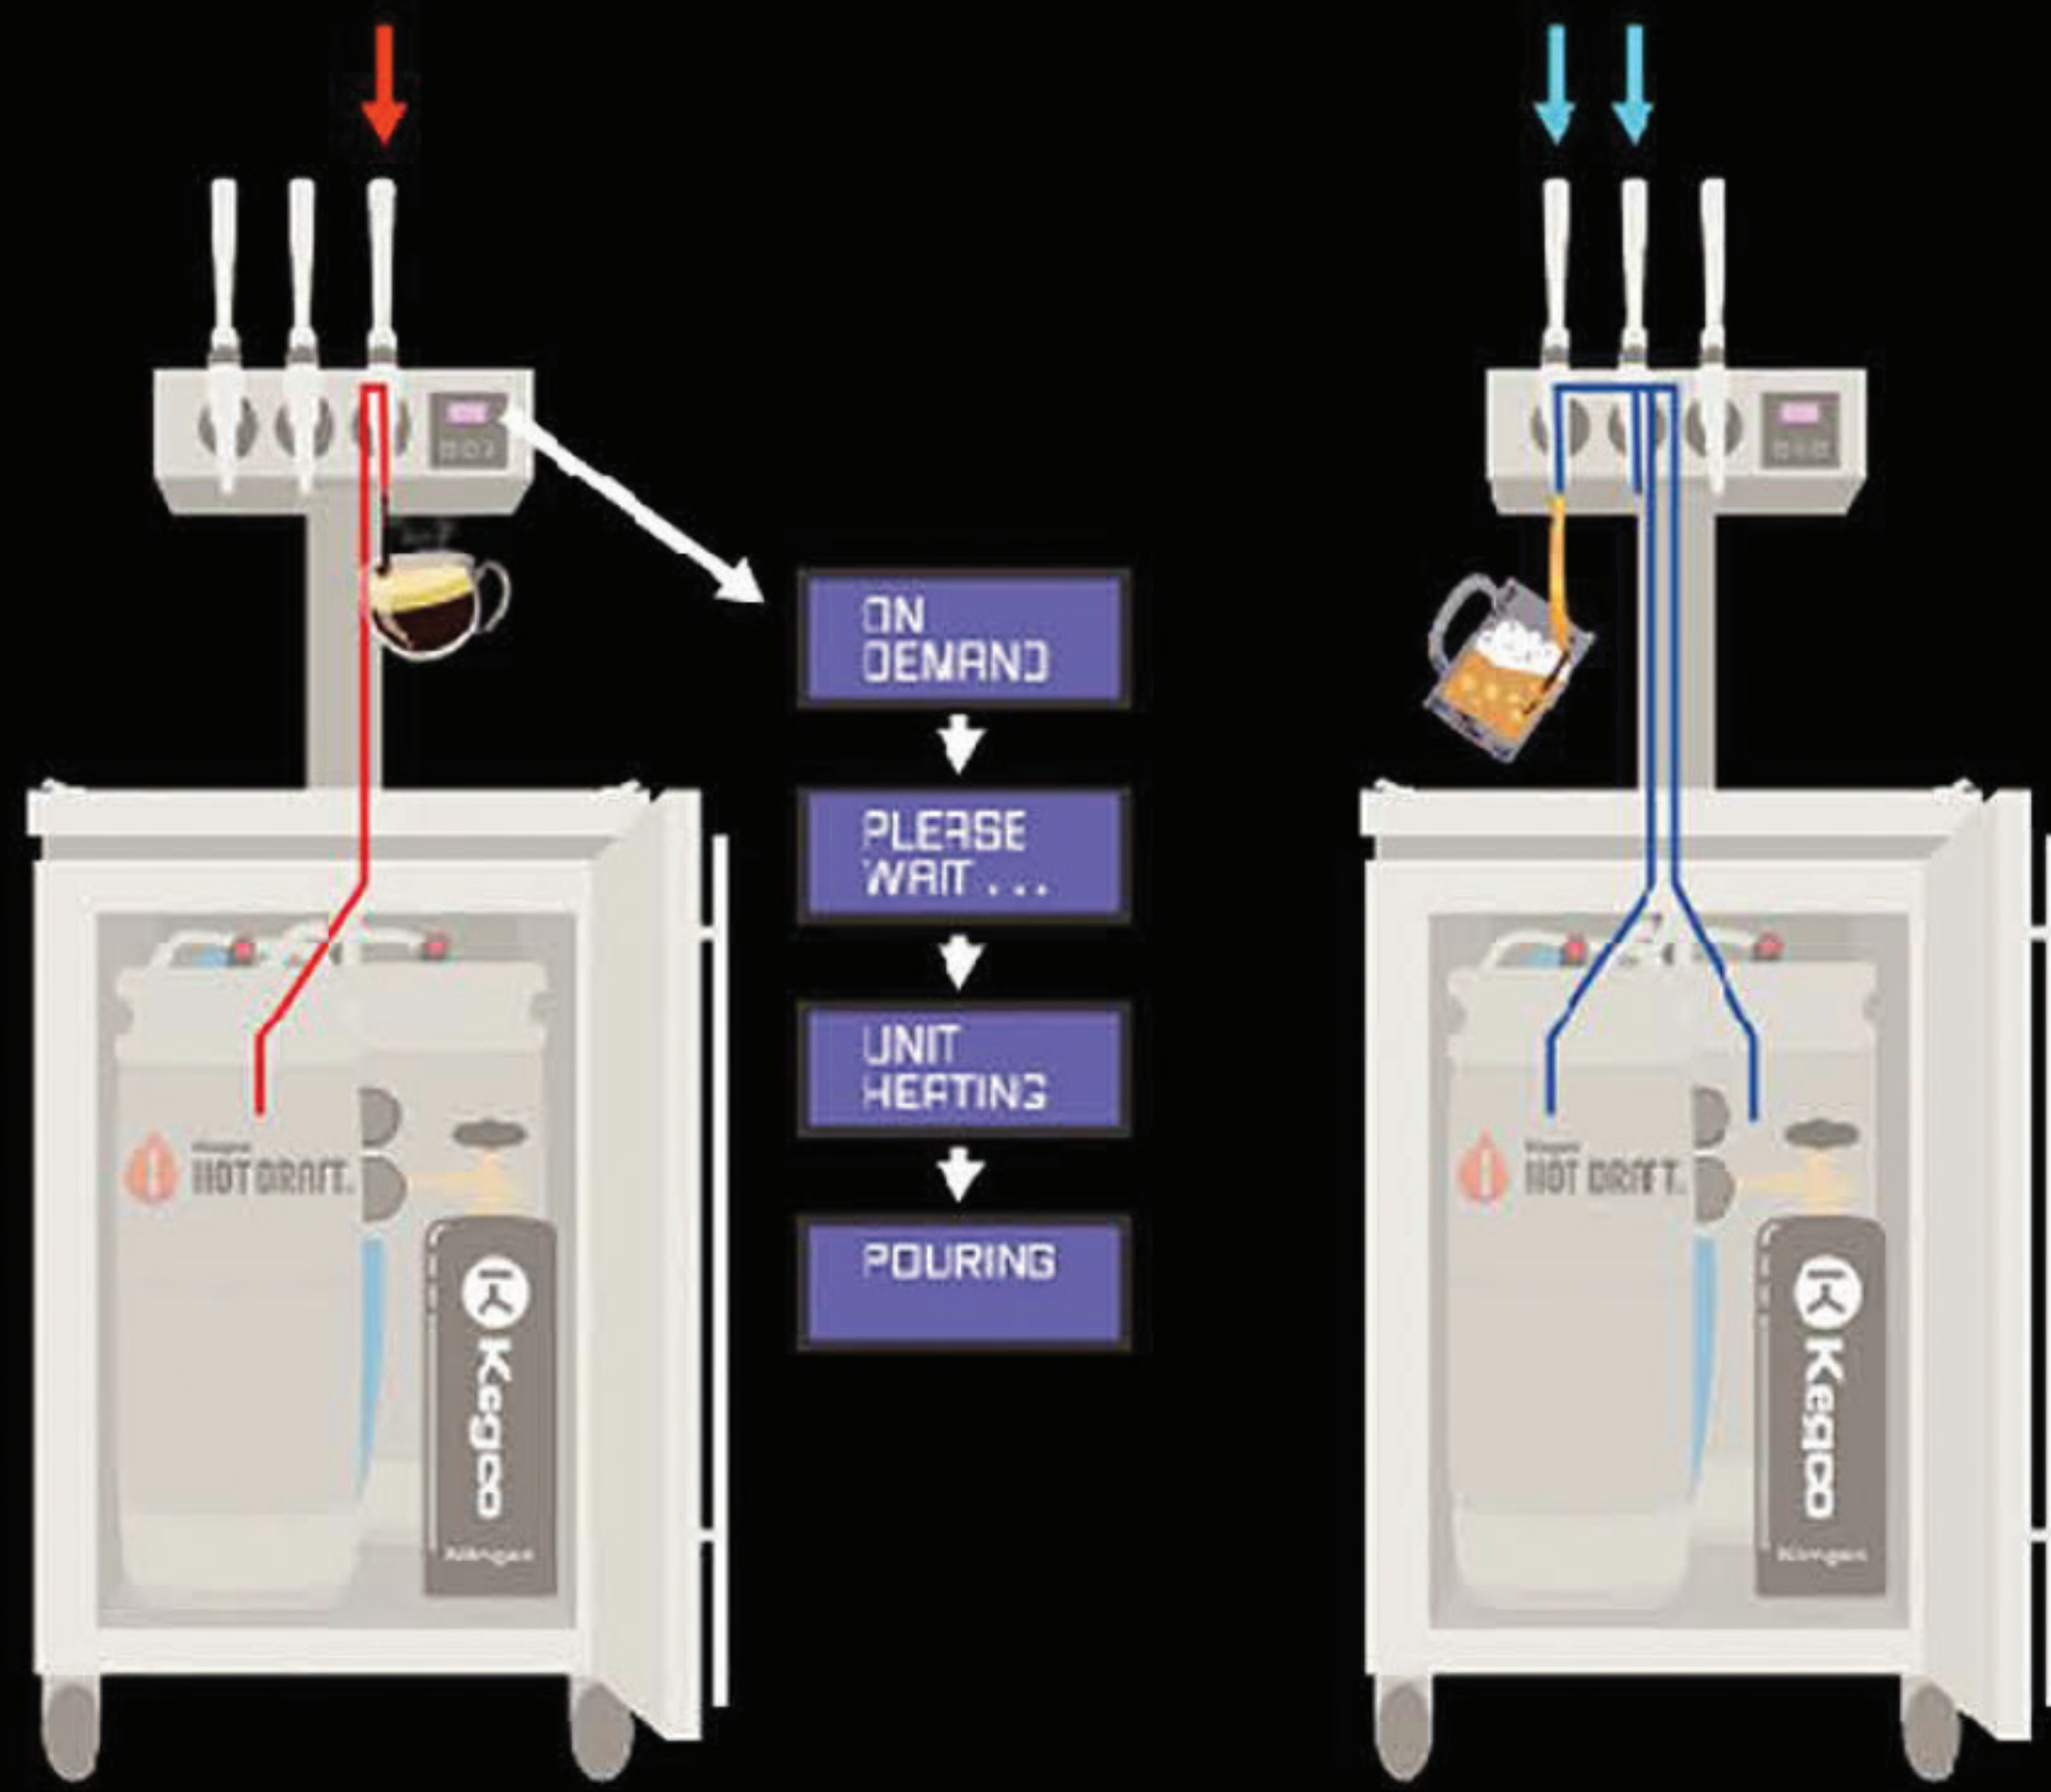


Kegco
HOT DRAFT

| TECHNICAL SPECIFICATIONS | |
|---|---|
| Dimensions (Tower) | 16 ⁵ / ₁₆ " (H) x 15" (W) x 7 ⁵ / ₈ " (D) |
| Operating Temperature Range | 140°F – 180°F |
| Wattage/Voltage/ Frequency/Amperage | 4.8 kW/240 V/60 Hz/20A 4.4 kW/230 V/60 Hz/20A 3.6 kW/208 V/60 Hz/18A |
| Operating Pressure Range (Optimal Operating Pressure Range) | 20 PSI – 40 PSI (25 PSI – 35 PSI) |
| Minimum Flow Rate | 0.15 GPM |
| Minimum/Maximum Inlet Beverage Temperature | 34°F/70°F |

| PRODUCT FEATURES | |
|------------------|---|
| On/Off Switch | Yes |
| Gas Used | Nitrogen |
| Electrical Plug | No |
| Taps Available | 3 |
| Display | LCD |
| Display Color | Blue |
| Buttons | Push |
| Appearance | Brushed Steel |
| Certifications | CSA C22.2 NO.109 NSF/ANSI STD.4 UL STD. 197 |

| TECHNICAL SPECIFICATIONS | |
|--------------------------|-------------------------------|
| Dimensions (Cabinet) | 40" (H) x 23.5" (W) x 31" (D) |
| Weight | 143 lbs. |
| Warranty | |
| Keg Storage Capacity | |
| Cooling System | |
| Controls | |

*208-240v 20a Power Required

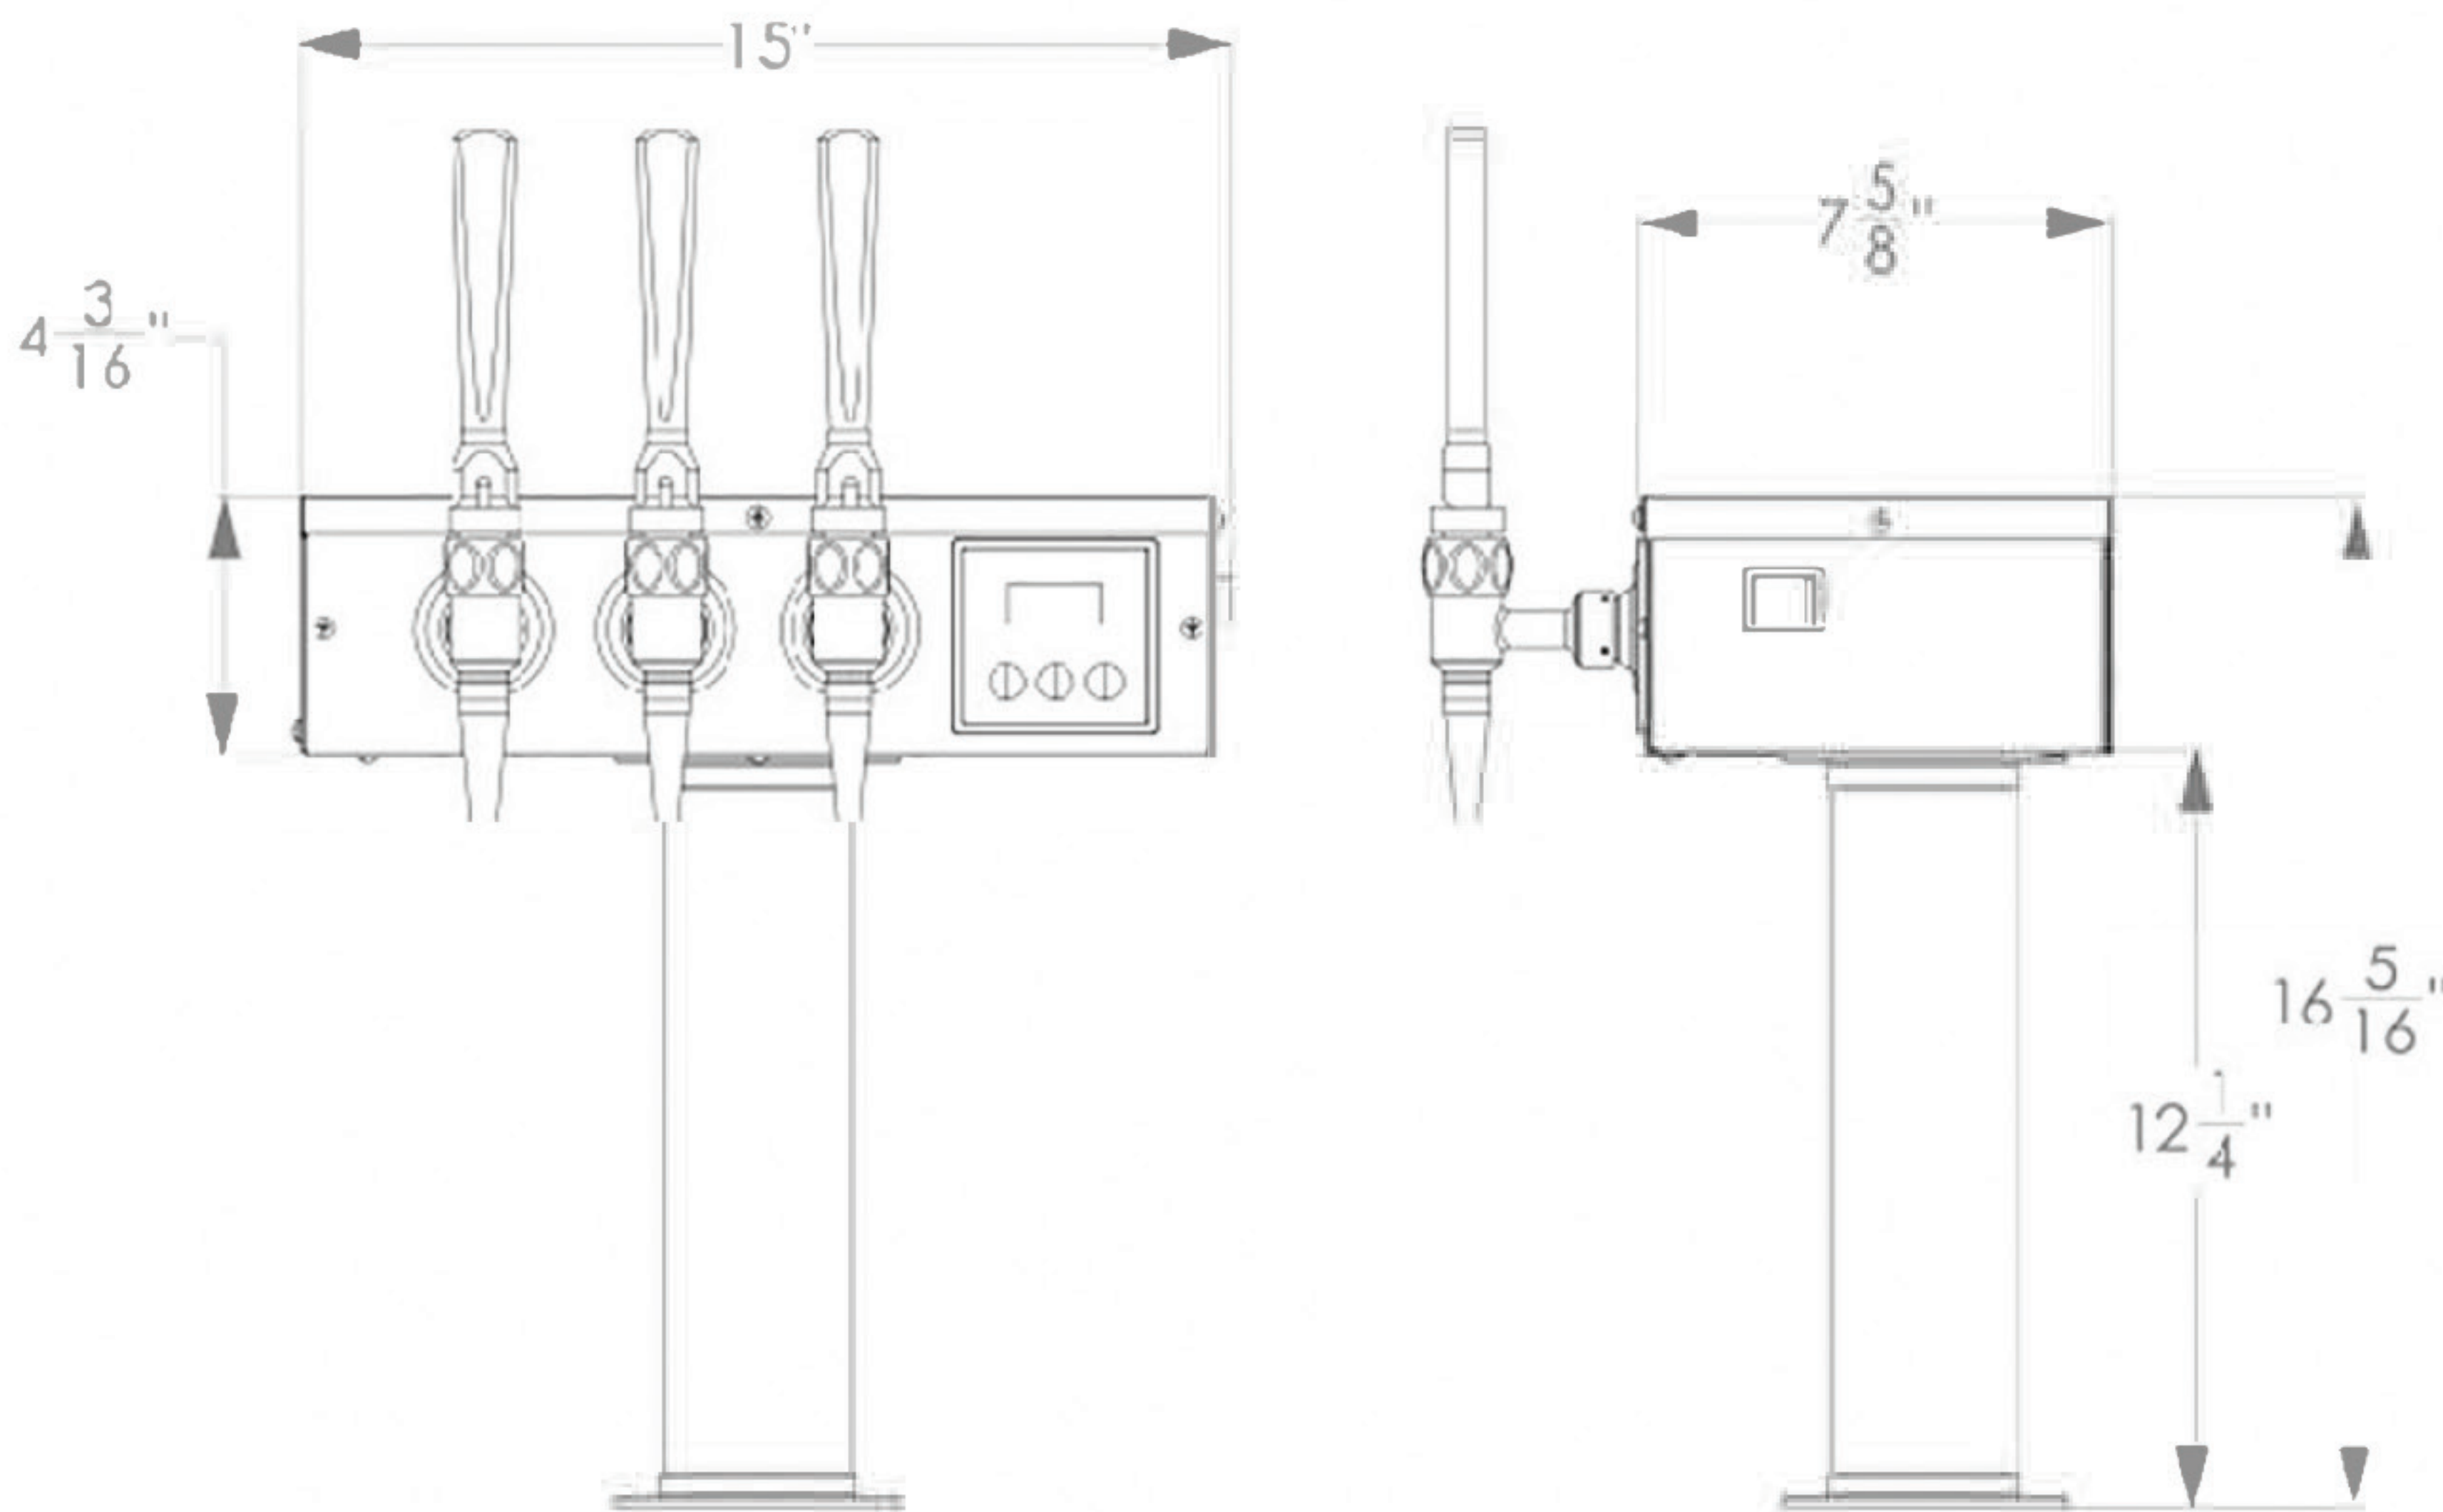

HOT DRAFT KIT INCLUDES



2 Nitro Faucets &
1 Standard Faucet



Beer & Gas Line
with Clamps



Low Profile
Splitter



Low Profile
Coupler



Nitrogen
Regulator



5 lb. Black Epoxy
Nitrogen Tank
(Empty)